


E-Z DUNGEONS


Raised Door

While the pictures below depict a door from a Dragonshire terrain kit, the physical model is the same as the dungeon version and assembles identically.

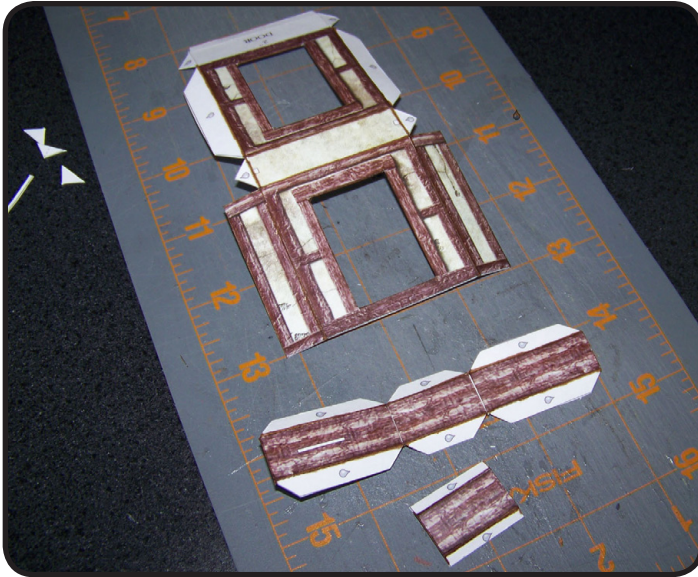


1: For opening doors on upper levels, you need to use the 'raised' version of the door frames to allow a foam-core tile to be placed against it and still have the door open. Cut, score and test fold the three pieces.

2: Begin by gluing the middle section of the door frame to the top of the interior face opening as shown above.

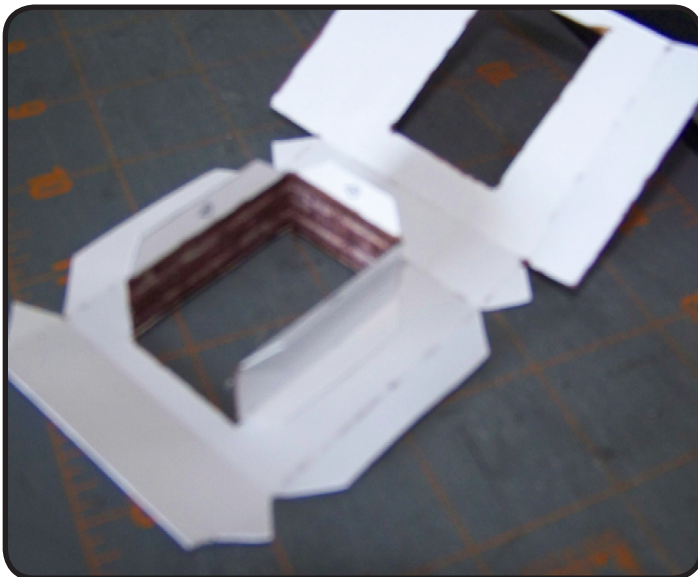


3: Now glue the sides.

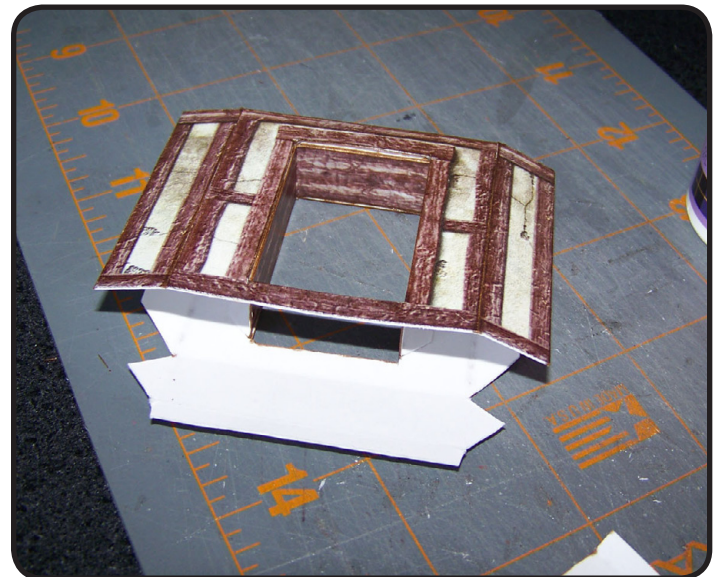


4: Flip the opposite exterior wall over and glue into place.


E-Z DUNGEONS

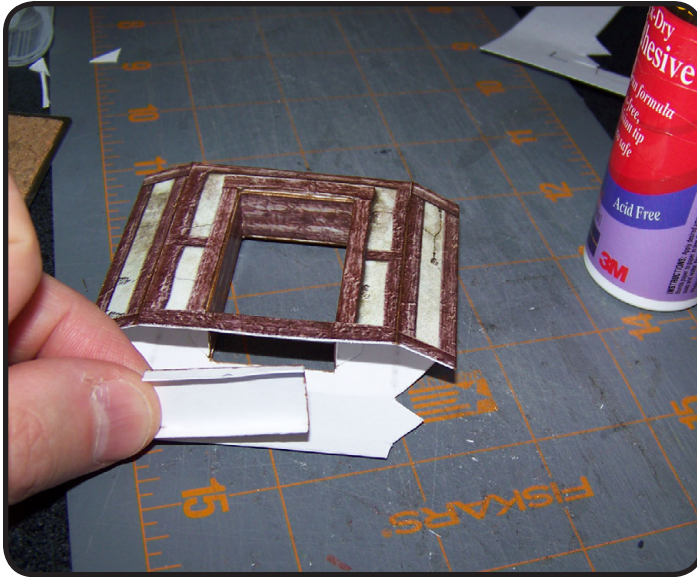

5: Insert and glue the lower interior piece in place.

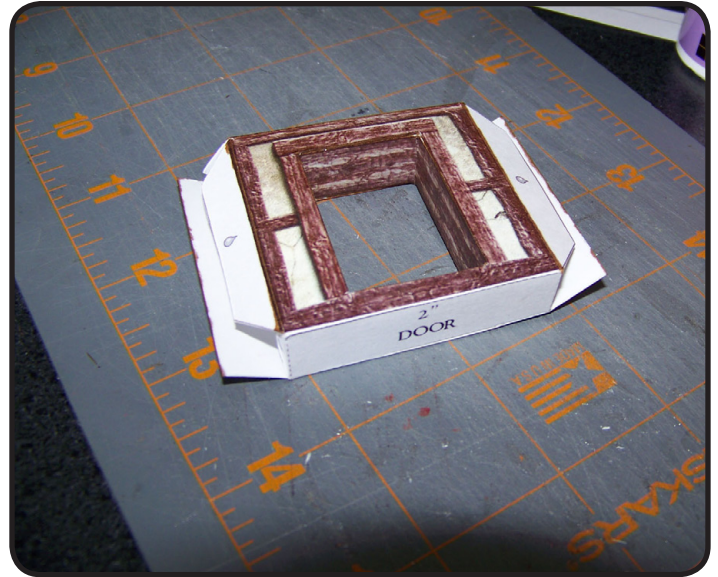

6: Now glue the bottom flap of the wall section.

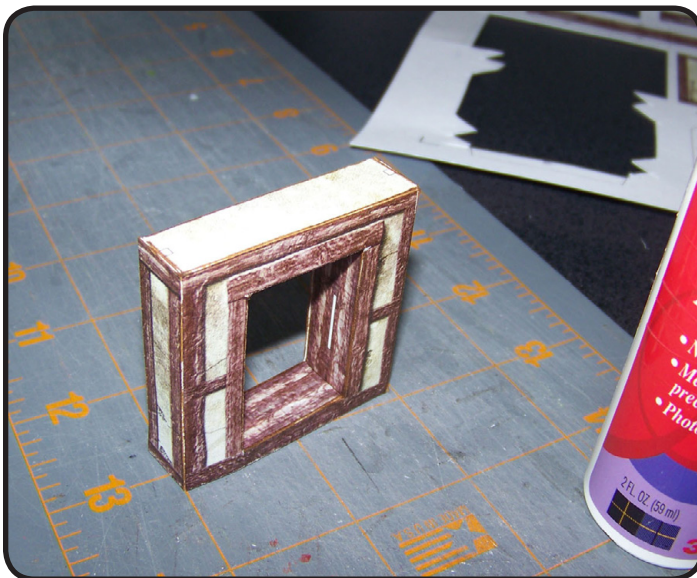

7: Finish by gluing the side flaps shut. The raised opening allows the door to still open while the frame is adjacent to a foamcore tile on upper levels.