






For Optional Open Rear Doors:
Cut out and remove doors on back of Armored Truck, fold the optional doors where indicated and glue creating interior and exterior surface. Glue the tabs of the Optional Open Rear Door A & B to the inside of the opening with the doors on the exterior of the vehicle. Glue the interior inside of the opening .





Optional Open Rear Door B




Fold Here




Attach Bottom Support here

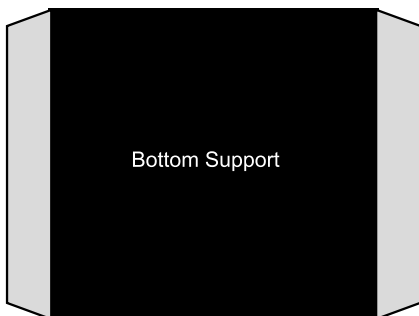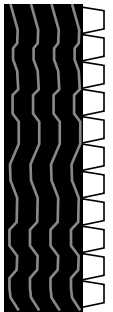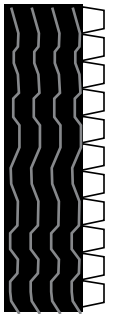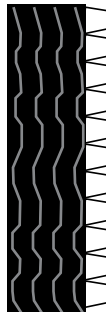

Bottom Support

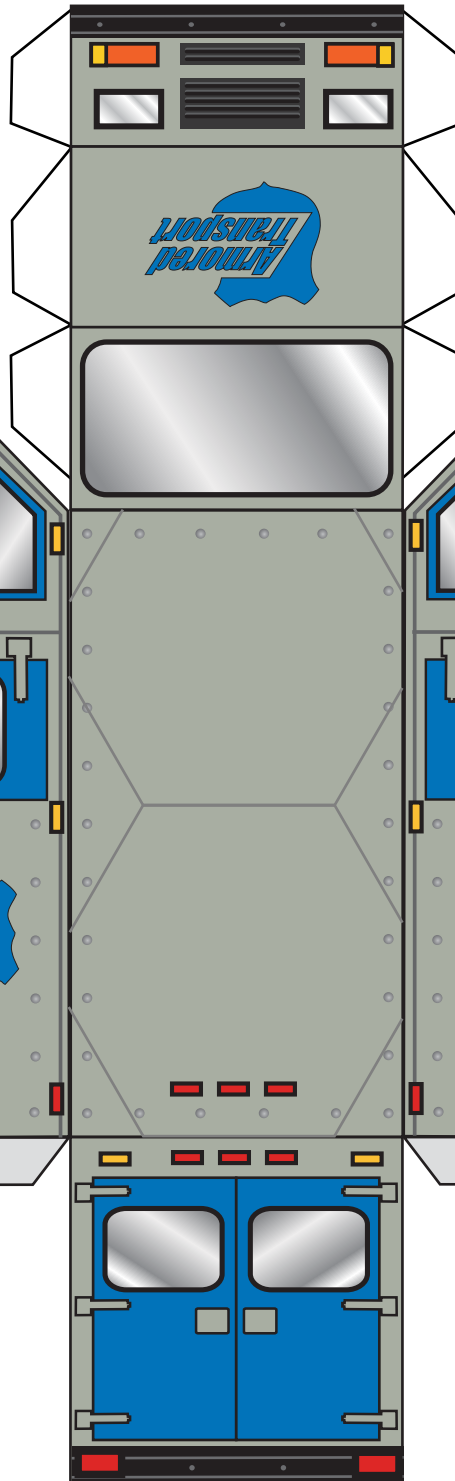

Vehicle is
6 levels high

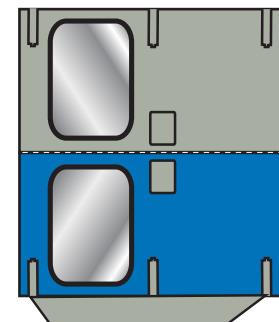

Fold Here

Optional Open Rear Door A