
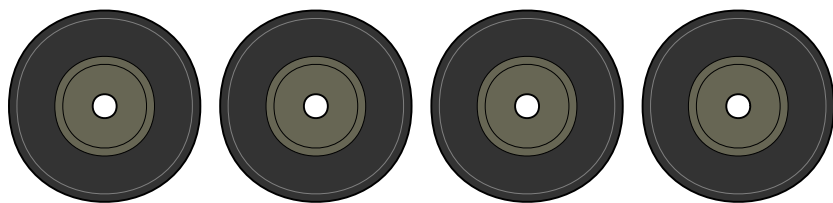
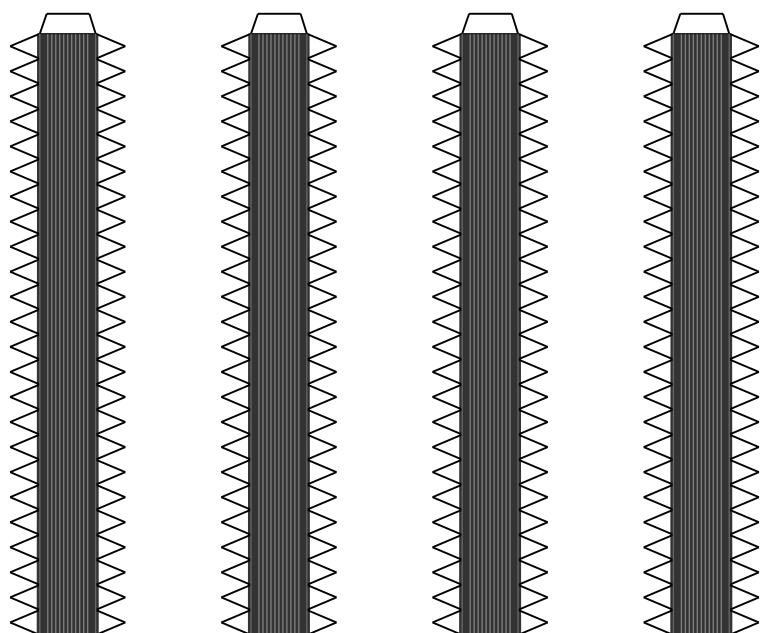


Transporter-Erector Launcher


Designed by Ron Caudillo

TIRES

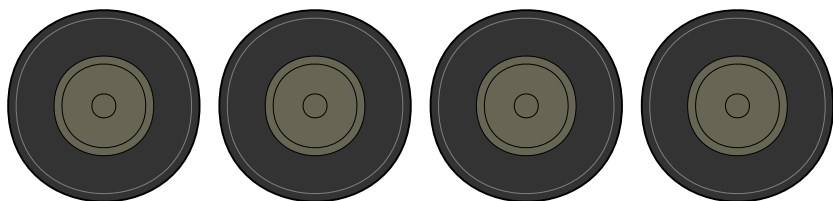


FRONT SUPPORT STRUTS AND PADS

Form tubes by rolling around toothpicks.
Glue grey ends to the square pads

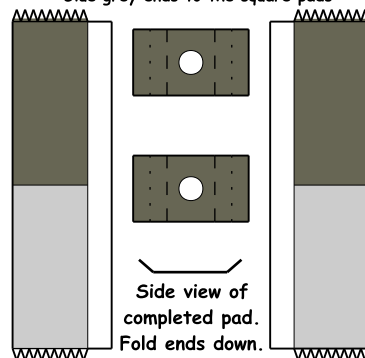



SUSPENSION BLOCKS

Fold all small triangles down

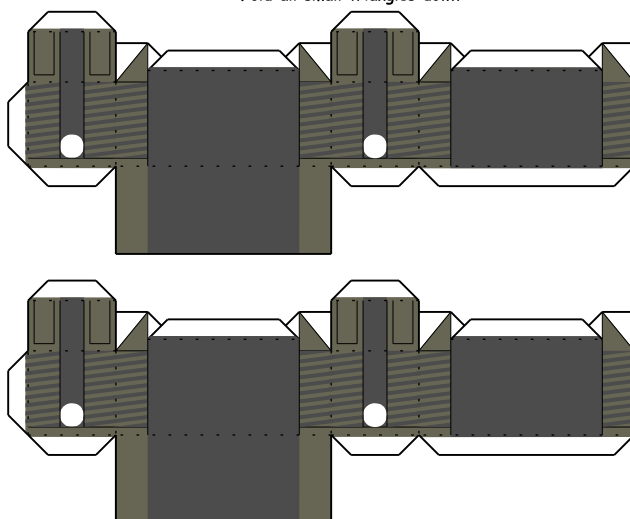

AXLES

Form tubes by rolling around toothpicks

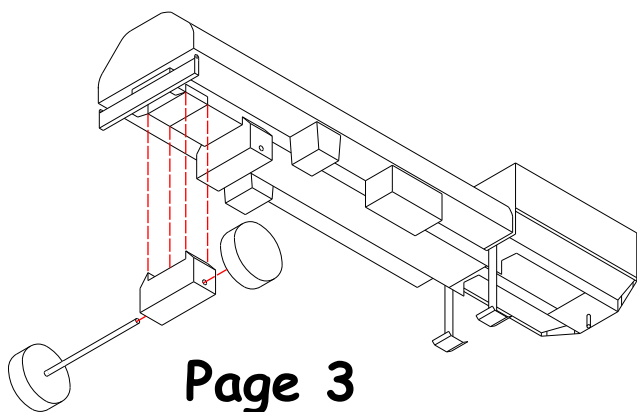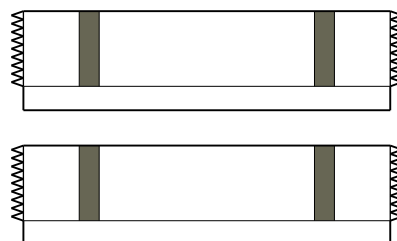

Page 3

To align the axle and tire assembly, glue one tire assembly to one end of an axle. Slide (do not glue) the axle through one of the suspension blocks and fit (do not glue) a second tire assembly to the other end of the axle. If the model does not stand evenly, remove the axle and enlarge the axle holes in the suspension block either up or down to allow the model to stand straight. Glue the axle and tire assemblies in place.